

Short description



- Fit for 4-wire load cells
- Easy installation
- Stainless steel housing

Available models

Model	Amount of connections	Full article description	Part number
JB-SS304	4	JB-SS304C-4	3008010
	6	JB-SS304C-6	3008015
	8	JB-SS304C-8	3008020
	10	JB-SS304C-10	3008022


Detailed specifications JB-SS304

Load cell output resistance range	Ω	340 to 1100
Load cell input resistance range	Ω	340 to 1100
Excitation, recommended voltage	V(AC&DC)	5 to 15
Excitation, maximum	V(AC&DC)	20
Load cell sensitivity range	mV/V	0.6 – 3
Cable \varnothing	mm	5 to 6.2
Correction method		Excitation trim
Trimming range	Ω	20 (± 10)
Temperature range, operating	$^{\circ}\text{C}$	-40...+85
Ingress protection		IP65
Housing connected to shield		No
External grounding		No


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Type JB-SS304

Dimensions in mm

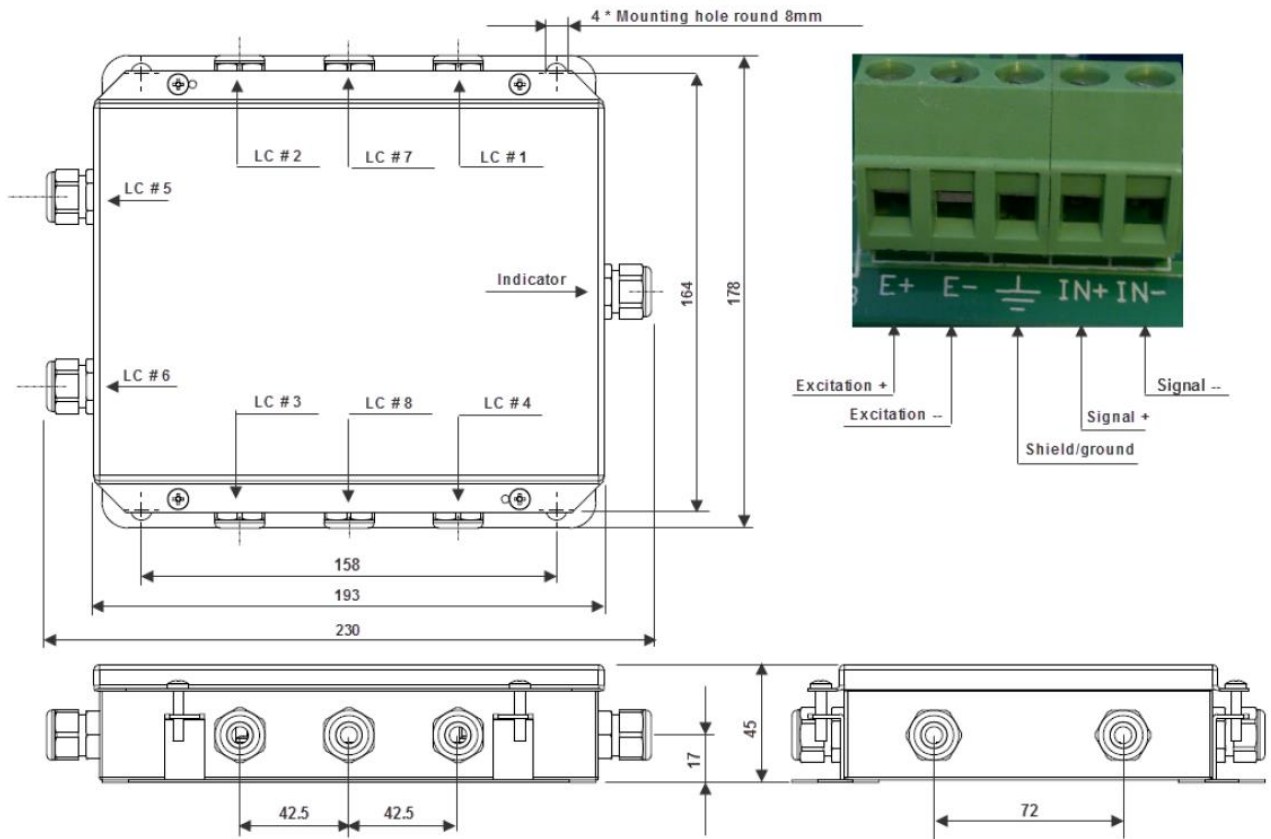

10 lcs

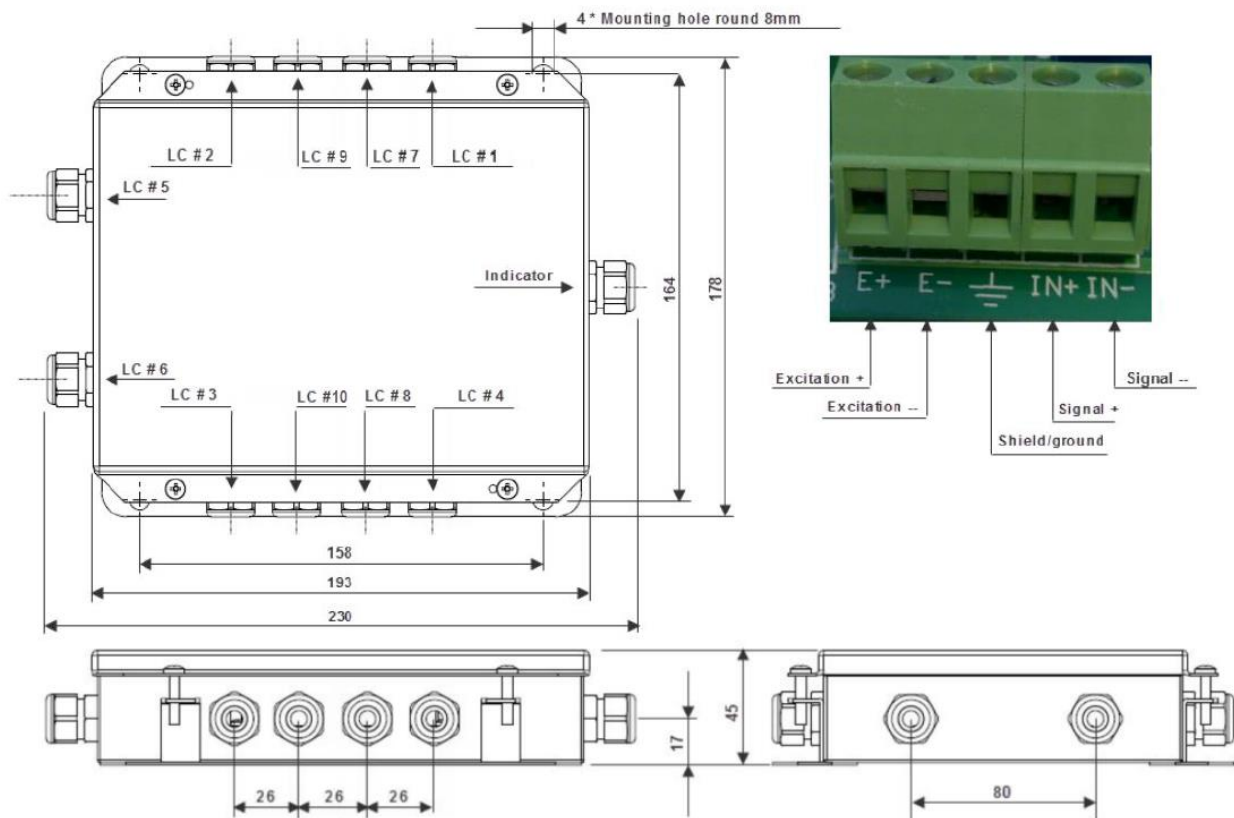

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.